TVGo DVB-T32

Genius
Live with Ideas

Turn your TV into a Digital TV Set

TVGo DVB-T32 offers the latest advancements in digital technology, encompassed in a slim, stylish, and space saving box. It lets you watch digital TV from traditional analogue TV, LCD TV or PDP TV. Connect it to an active antenna and you can easily obtain reception of free view digital terrestrial channels and radio stations in your area. TVGo DVB-T32 is a superb value for money.

With 2 SCARTS, Antenna in, Antenna out, it is quick and easy to set up with widescreen (16:9) switching.

Also, the EPG (Electronic Program Guide) and multi-channel preview allow for improved channel selection, future program listings and program grouping by preference. Teletext provides you more information on TV programs.

DVB Digital Video Broadcasting

Support EPG & Subtitle

Selling Points- *User-friendly Operation Design*

- Various channel editing functions (favorite, moving, locking, renaming, deleting and sorting)
- Stores up to 1600 programs
- Timer function, automatically turns On/Off by setting function (daily, weekly, monthly, one time)
- Message Function, auto pop up specified message by setting function (daily, weekly, monthly, yearly)
- Electronic Program Guide (EPG) and Subtitle support
- OSD Teletext (DVB ETS 300 706) and VBI Teletext support
- Multi video output - CVBS, RGB
- Automatic PAL/NTSC conversion
- Multi-Picture Preview
- Parental Lock support

TVGo DVB-T32

Application Diagram:

Connection Diagram:

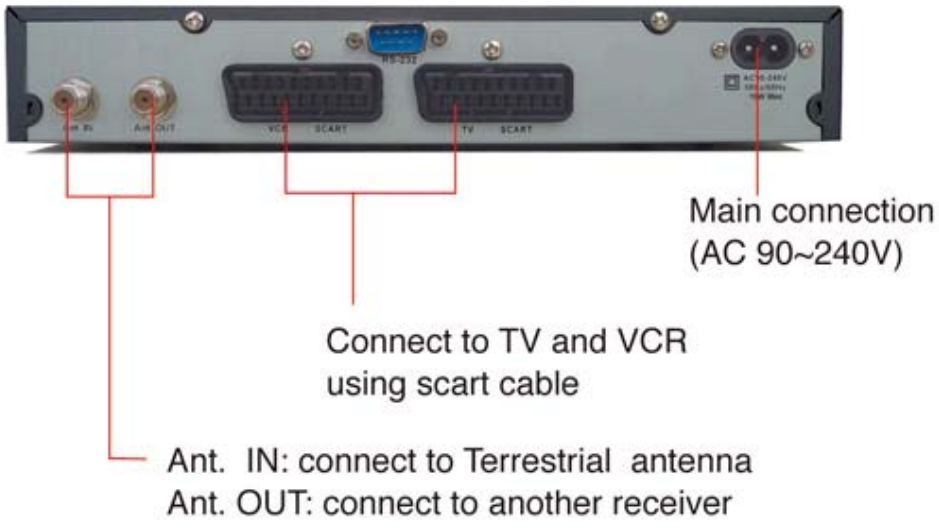
Main connection
(AC 90~240V)
Connect to TV and VCR
using scart cable
Ant. IN: connect to Terrestrial antenna
Ant. OUT: connect to another receiver

Note: The RS-232 port is for connecting to a PC for first unit firmware upgrade. After one unit is upgraded, you can use the SCART port to quickly upgrade other units.

TVGo DVB-T32

Package Contents:

- TVGo DVB-T32
- Remote Control (with 2 AAA batteries)
- English User's Manual
- Multi-language Quick Guide
- SCART Cable
- Power Cord

Specifications:

Item	Description
Input:	RF input for inputting digital antenna RS-232 input for first unit firmware upgrading and SCART port for quickly upgrading other units' firmware. Power input VCR SCART input
Output	TV SCART output Composite output
TV Tuner:	Input Terminal: 75 Ohm F connector 174~230 MHz / 470~862 MHz
Video resolution	720 x 576 (PAL); 720 x 480 (NTSC)
Demodulator and FEC:	Fully DVB-T Compliant FDM Transmission: 2K/8K FFT Guard Interval: 1/4, 1/8, 1/16, 1/32, OFDM Symbol Length Convolution FEC Rate: 1/2, 2/3, 3/4, 5/6, 7/8 Bandwidth: 7 or 8 MHz Data Rate: 31.67 Mbps Max Constellation: QPSK, 16-QAM, 64-QAM Digital Signal Input Level: -20~-78.5 dBm (64 QAM PR=2/3)
Power supply	Main Input Voltage: AC 90V~260V Nominal Power Consumption: Max. 10W

TVGo DVB-T32

On Screen Display language	8 languages: English, Russian, French, Spanish, Czech, Greek, Slovakian, Arabic
Quick Installation Guide language	8 languages: English, Russian, French, Spanish, Czech, Greek, Slovakian, Arabic

WEEE Information	
Body Weight (g)	720g
Body Dimension (LxWxH mm)	257mm x 42mm x110mm
Gift-Box package weight	1.195 kg
Gift-Box Dimension (LxWxH mm)	350mm x 60mm x190mm
Shipping Information	
PCs/Carton	5pcs/Carton
CUFT/Carton	0.95 CUFT/Carton
Dates available	
Mass Production	OCT.30, 2006.

Comparison chart:

Model	TVGo DVB-T31	TVGo DVB-T32
Flash	1Mbyte	2Mbyte
Message Function	N	Y
Multi-Picture Preview	N	Y
Scart /VCR connector	Y	Y
Channel edition	Y	Y
Timer function (auto turn on/off)	Y	Y
Audio	RCA (L & R)	N/A
SPDIF (Digital Audio)	1 (OPTICAL)	N/A
Firmware update	By RS232	By RS232 and Scart

TVGo DVB-T32

Body Size (W x H x D)	**257mm x 43mm x 155mm**	**257mm x 42mm x110mm**
Body Weight (Net)	**921g**	**720g**
GB Size (W x H x D)	**364mm x 78mm x 275mm**	**350mm x 60mm x190mm**
GB package Weight (Net)	**1.647 kg**	**1.195kg**

Product Family

TVGo A11	TVGo A31	TVGo DVB-T02Q	MP-2501	TVGo A03

Camera and Video Product Family

DSC	DV	Web CAM	IP CAM	Video